
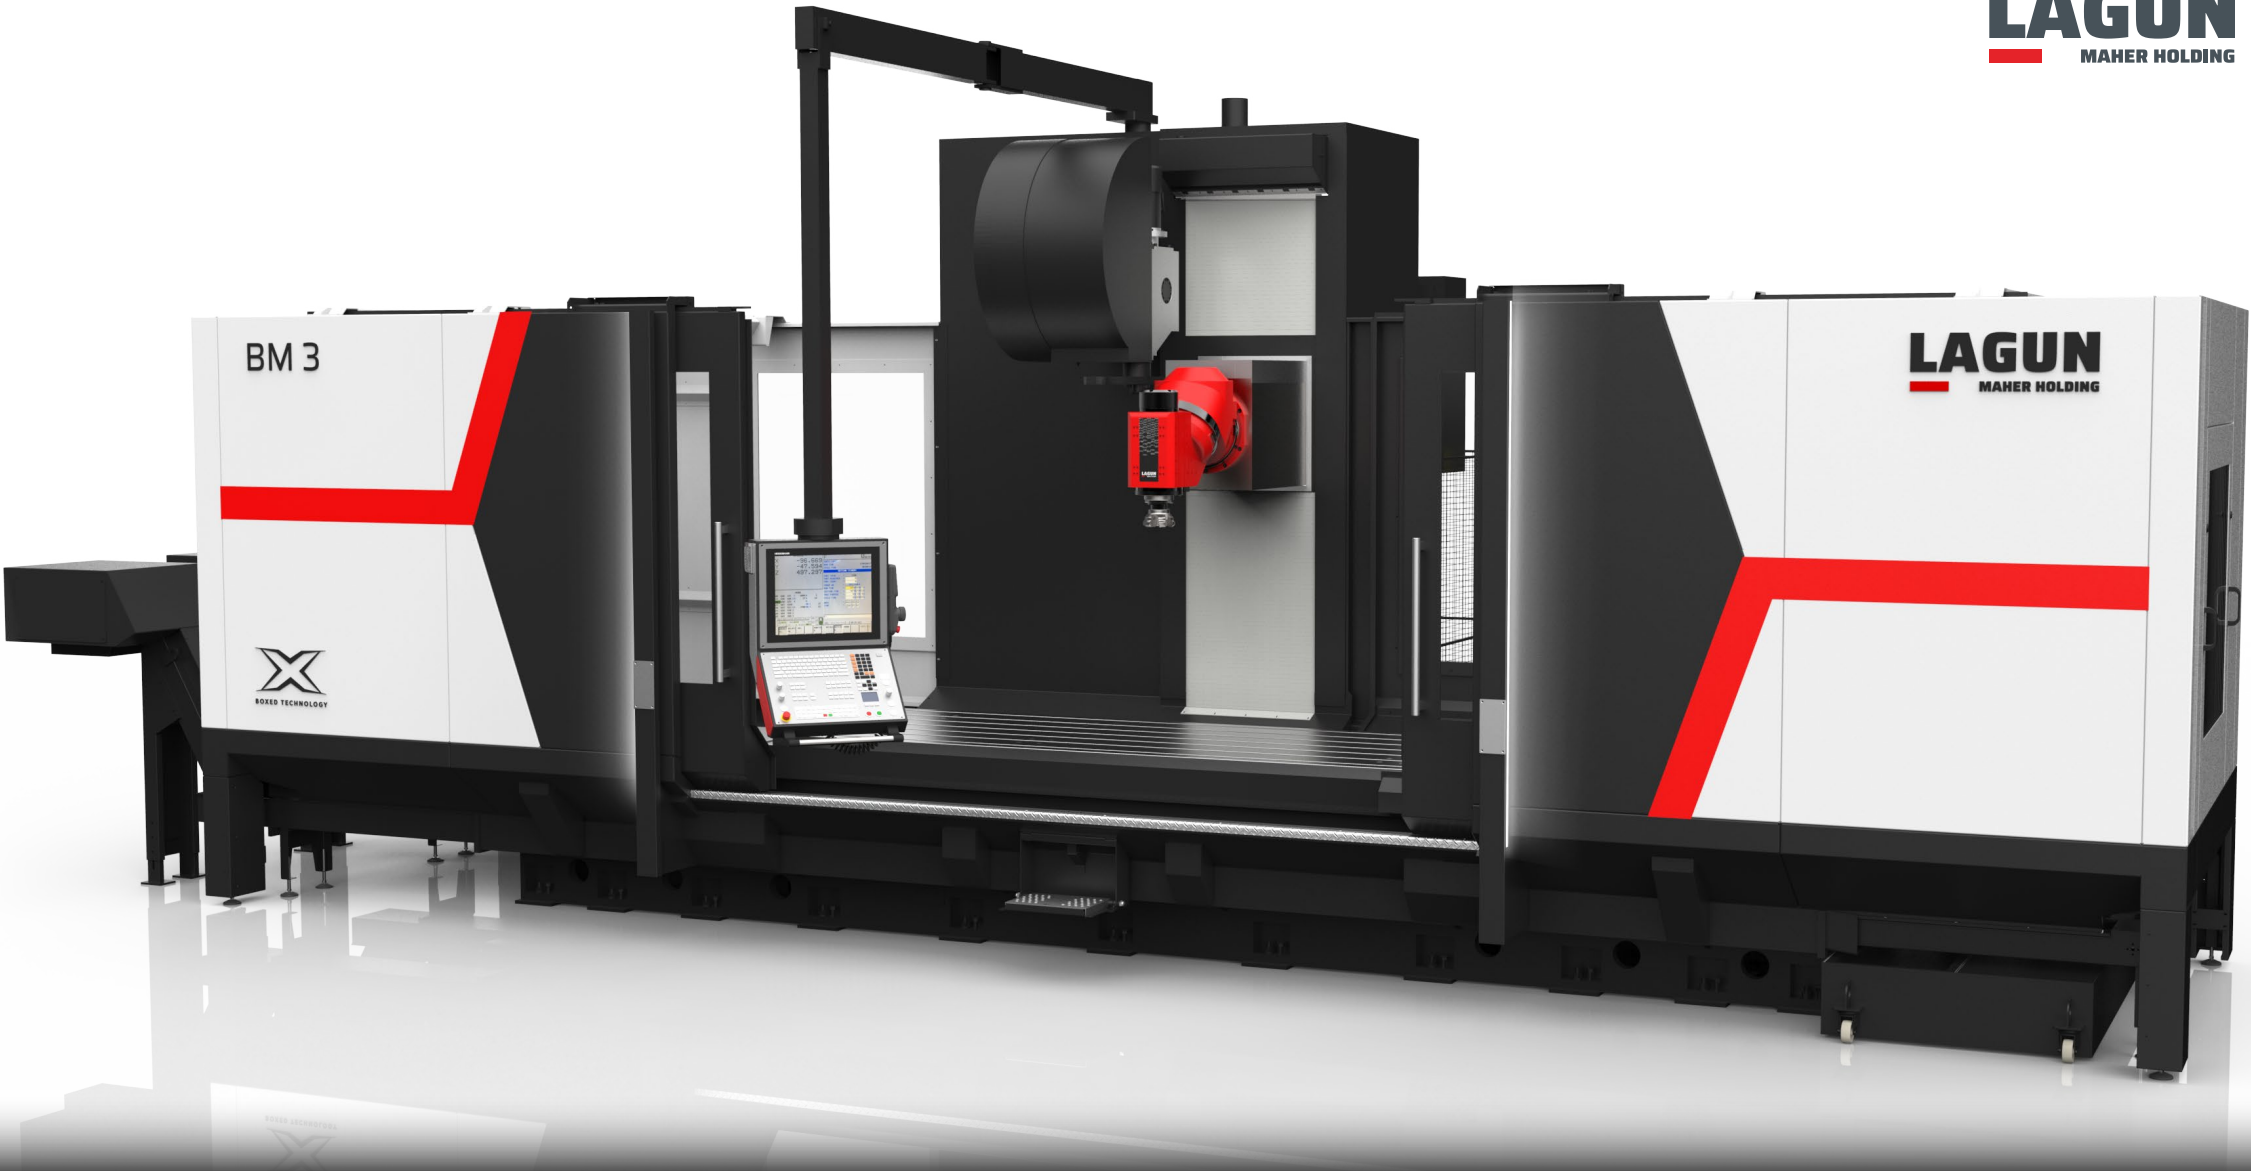


BM-BL

FRESADORA DE BANCADA FIJA
FRAISEUSES À BANC FIXE

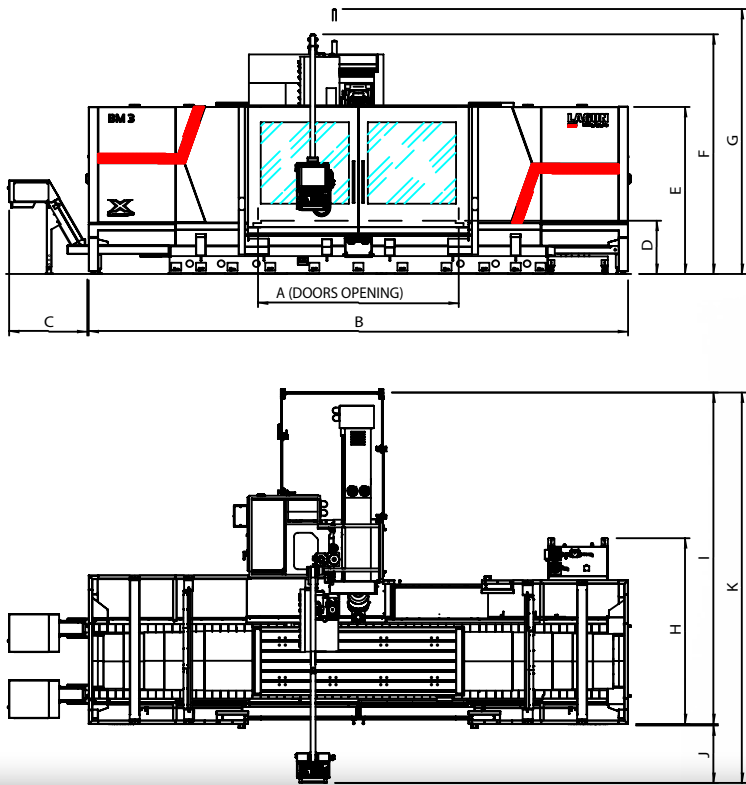

	A	B	C	D	E	F	G	H	I	J	K
BM - BL 2	2.200	6.560									
BM - BL 3	3.200	8.560			2.665	3.815	...	2.963	5.269	931	6.200
BM - BL 4	4.200	10.560	1.260	865	3.165 (1) 3.665 (2)	4.315 (1) 4.815 (2)	4.715 (1) ...	3.198 (3)	5.634 (3)		6.566 (3)
BM - BL 5	5.200	12.560									

(1) BM/BL (Z 2.000) - (2) Opcional BL / BL Optionnel (Z 2.500) - (3) Estándar BL / BL Standard.

CARACTERÍSTICAS TÉCNICAS CARACTÉRISTIQUES TECHNIQUES




		BM 2	BM 3	BM 4	BM 5	BL 2	BL 3	BL 4	BL 5
Superficie de mesa Surface de la table	mm	2.100 x 1.100	3.100 x 1.100	4.100 x 1.100	5.100 x 1.100	2.100 x 1.300	3.100 x 1.300	4.100 x 1.300	5.100 x 1.300
Ranuras en T Rainures en T	mm	7 x 22 x 160				8 x 22 x 160			
Curso longitudinal=X Course longitudinale=X	mm	2.000	3.000	4.000	5.000	2.000	3.000	4.000	5.000
Curso transversal=Y Course transversale=Y	mm	1.300				1.500			
Curso vertical=Z Course verticale=Z	mm	1.500 / 2.000*				2.000 / 2.500*			
Peso máximo sobre la mesa Poids admissible sur la table	Kg	8.000	10.000	12.000	14.000	8.000	10.000	12.000	14.000
Cono de portafresas Cône de la broche		50 DIN 69871/A + DIN 69872/A				50 DIN 69871/A + DIN 69872/A			
Gama de velocidad Gamme de vitesses	min ⁻¹	6.000				6.000			
Potencia del motor principal Puissance moteur principal	kW	31 - 37,2 / 40 - 53*				40 - 53			
Par Couple	Nm	982 / 1.400*				972 / 1.400*			
Avance rápido Avance rapide	mm/mn	30.000				30.000			
Peso neto de la máquina Poids net de la machine	Kg	18.200	21.800	26.000	30.100	19.800	23.700	27.800	32.000

*Opcional / Optionnel

EJECUCIÓN
MISE EN ŒUVRE

AVISO
AVIS

ALARMA
ALARME



Led de advertencia.
LED d'avertissement.